




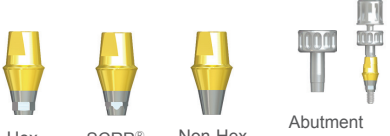
























Neobiotech
IMPLANT SYSTEM

IS Implant System / EB Implant System / IT Implant System / S-Mini Implant System / Surgical Kit

IS Implant System Chart


Fixture	Healing & Cover Screw	Abutment		Impression Coping	Lab Analog
 IS-III active  IS-II active	 Healing Abutment	Solid	 Solid Hex SCRP [®] Non-Hex	 PickCap	
		Cemented	 Hex SCRP [®] Non-Hex Abutment Positioner	 Impression Cap	
		Angled	 Hex(A-Type) Hex(B-Type) Non-Hex	 Pick-up Hex SCRP [®]	 Fixture Level
		Shapable	 Hex Non-Hex	 Non-Hex	
	 Cover Screw	UCLA	 Gold Hex SCRP [®] Non-Hex	 Non-Hex	 Abutment Level
			 CCM Hex SCRP [®] Non-Hex	 Transfer Hex Non-Hex	
		Temporary	 Hex SCRP [®] Non-Hex	 Impression coping positioner	
		Ball	  Clinical Retainer  Housing	 Lab Retainer  Housing	 Ball Lab Analog

The image features three wireframe models of dental implants against a dark background. One model is positioned at the top left, another at the top right, and a larger, more detailed one is centered at the bottom. The models consist of a series of stacked, slightly offset rings, creating a helical or spiral structure. The text is overlaid on the left side of the image.

Neobiotech
IS IMPLANT SYSTEM

IS-III active / IS-III active S-Narrow / IS-III active S-Wide / IS-II active / IS-II active S-Wide

IS-III active

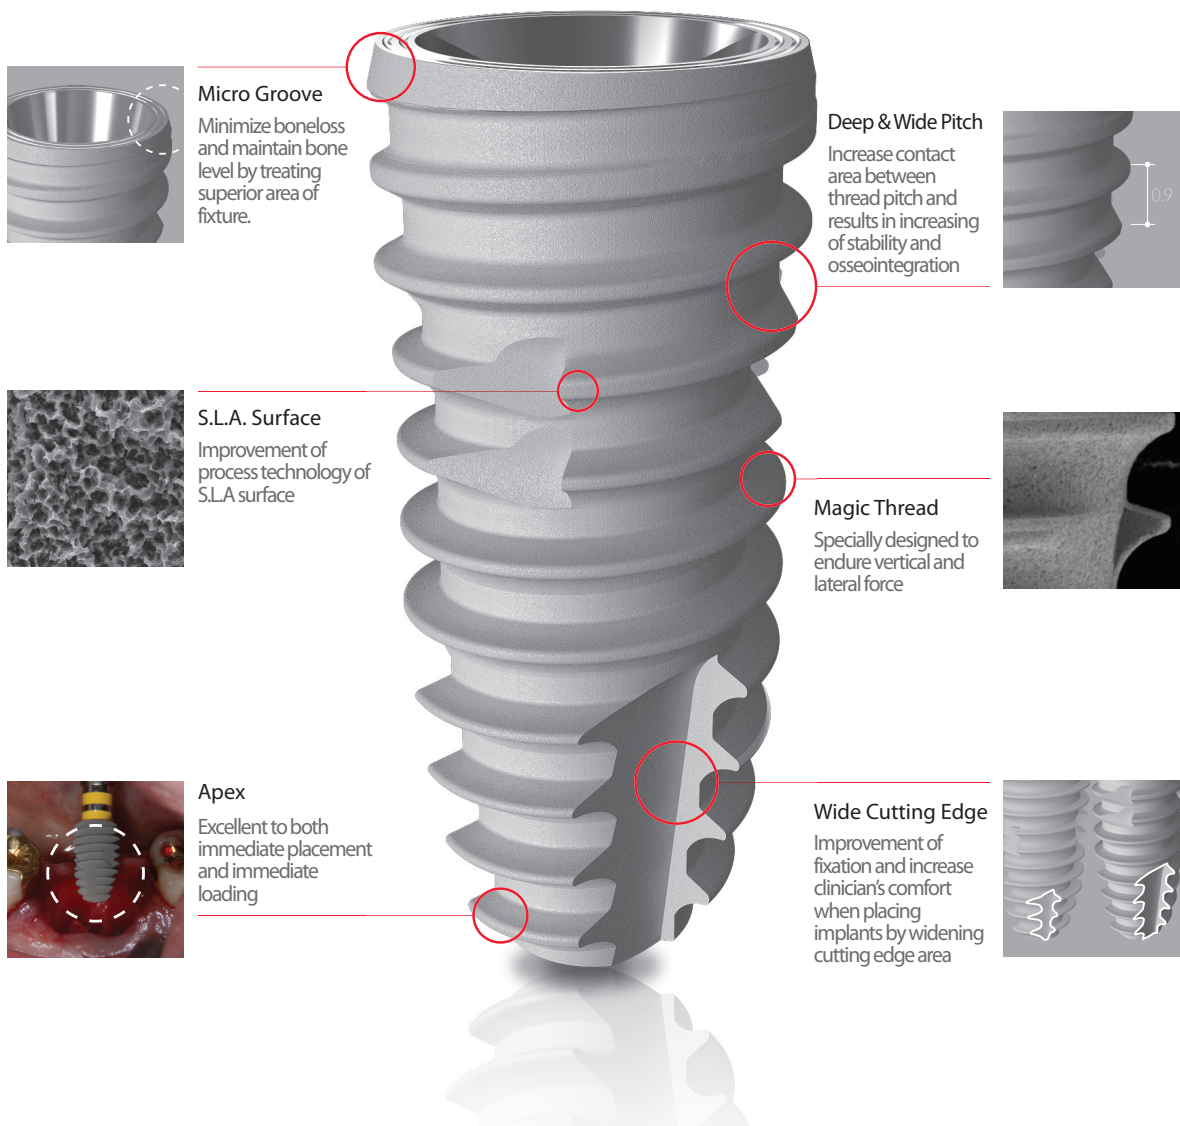

Micro Groove
Minimize bone loss and maintain bone level by treating superior area of fixture.


Deep & Wide Pitch
Increase contact area between thread pitch and results in increasing of stability and osseointegration

S.L.A. Surface
Improvement of process technology of S.L.A surface


Magic Thread
Specially designed to endure vertical and lateral force

Apex
Excellent to both immediate placement and immediate loading


Wide Cutting Edge
Improvement of fixation and increase clinician's comfort when placing implants by widening cutting edge area



- Osteoconductivity Implant Surface (S.L.A.)
- Crestal MacroThread Design
- Self-Compactable Apex
- Powerful Deep Thread
- Micro Groove Design
- Conical Seal 11°

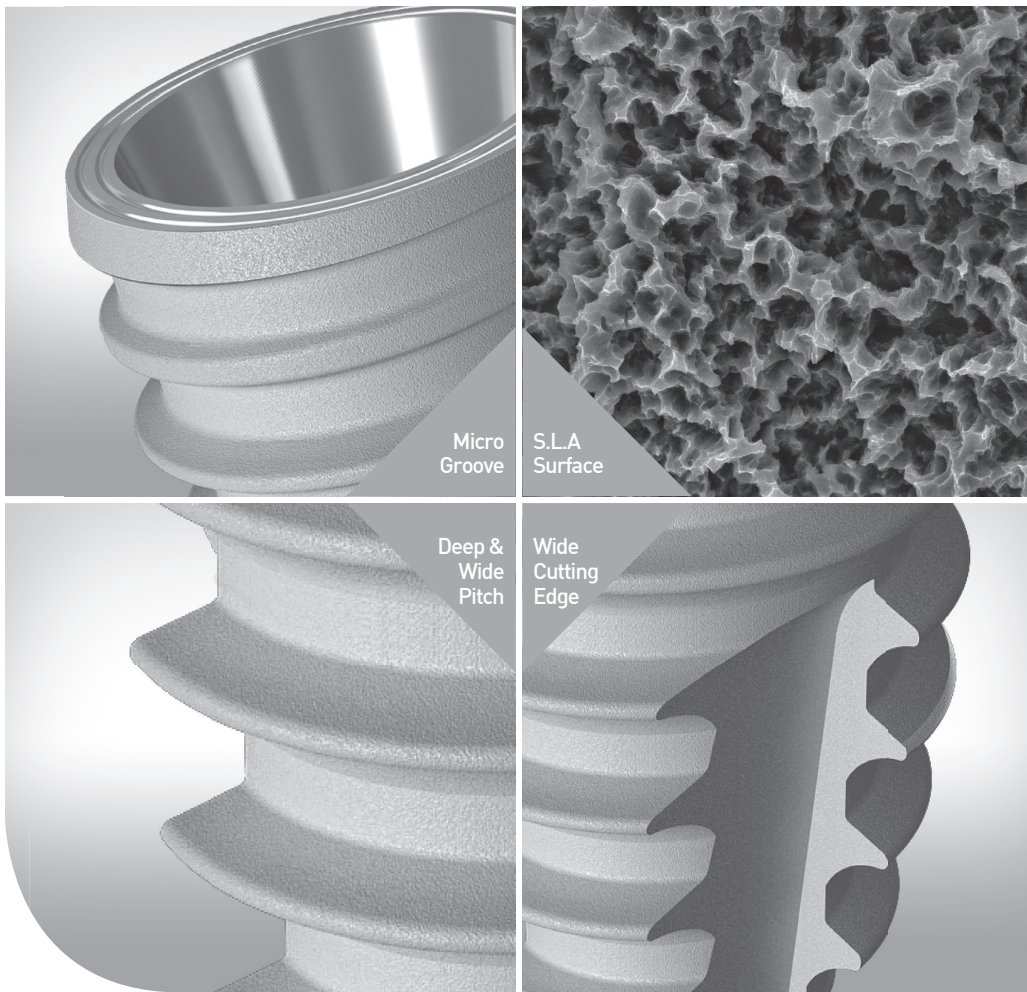


Clinical Case

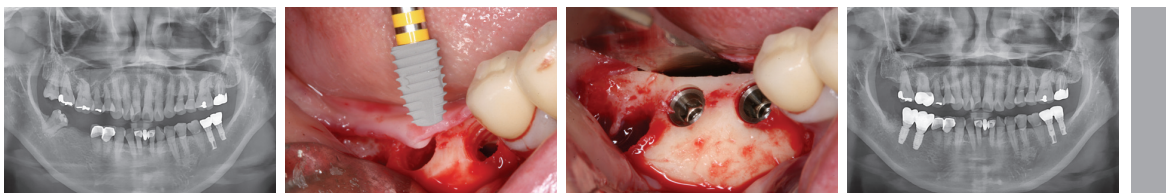

IS-III active Fixture(s.L.A. Surface)

The fixture bigger than Ø4.5 diameter is recommended to be placed in posterior area.


- Cover Screw Excluded Fixture product code
 fixture product code (ex : IS34010AP)
 S-narrow : ISC25S
 Narrow : ISN30S
 Regular / Wide / S-Wide : ISC40S




• S-Narrow / Diameter Ø 3.2




Length(mm)	8.5	10.0	11.5	13.0
Product name	IS35N3008AP	IS35N3010AP	IS35N3011AP	IS35N3013AP



• Narrow / Diameter Ø 3.5




Length(mm)	8.5	10.0	11.5	13.0
Product name	IS33508AP	IS33510AP	IS33511AP	IS33513AP



• Regular / Diameter Ø 4.0




Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	IS34007AP	IS34008AP	IS34010AP	IS34011AP	IS34013AP




• Regular / Diameter Ø 4.5



Length(mm)	7.3	8.5	10.0	11.5	13.0
Product name	IS34507AP	IS34508AP	IS34510AP	IS34511AP	IS34513AP



• Wide / Diameter Ø 5.0



Length(mm)	6.6	7.3	8.5	10.0	11.5	13.0
Product name	IS35006AP	IS35007AP	IS35008AP	IS35010AP	IS35011AP	IS35013AP


※ All measurements can be different with the actual size

* Scale 1 : 1.1

IS-III active Fixture(s.L.A. Surface)

The fixture bigger than Ø4.5 diameter is recommended to be placed in posterior area.


- Cover Screw Excluded Fixture product code
 fixture product code (ex : IS34010AP)
 S-narrow : ISC25S
 Narrow : ISN30S
 Regular / Wide / S-Wide : ISC40S



• S-Wide / Diameter Ø 5.5



Length(mm)	6.6	7.3	8.5	10.0	11.5	13.0
Product name	IS35506AP	IS35507AP	IS35508AP	IS35510AP	IS35511AP	IS35513AP



• S-Wide / Diameter Ø 6.0



Length(mm)	6.6	7.3	8.5	10.0	11.5	13.0
Product name	IS36006AP	IS36007AP	IS36008AP	IS36010AP	IS36011AP	IS36013AP

※ Requires S-Wide surgical kit for diameter Ø5.5 ~ Ø6.0 fixture
 ※ All measurements can be different with the actual size

Cover Screw

S-Narrow



ISC25S*

Narrow




ISN30S

ISN30M

ISN30L



Regular / Wide / S-Wide




ISC40S

ISC40M

ISC40L





* This component is only for S-narrow fixture.

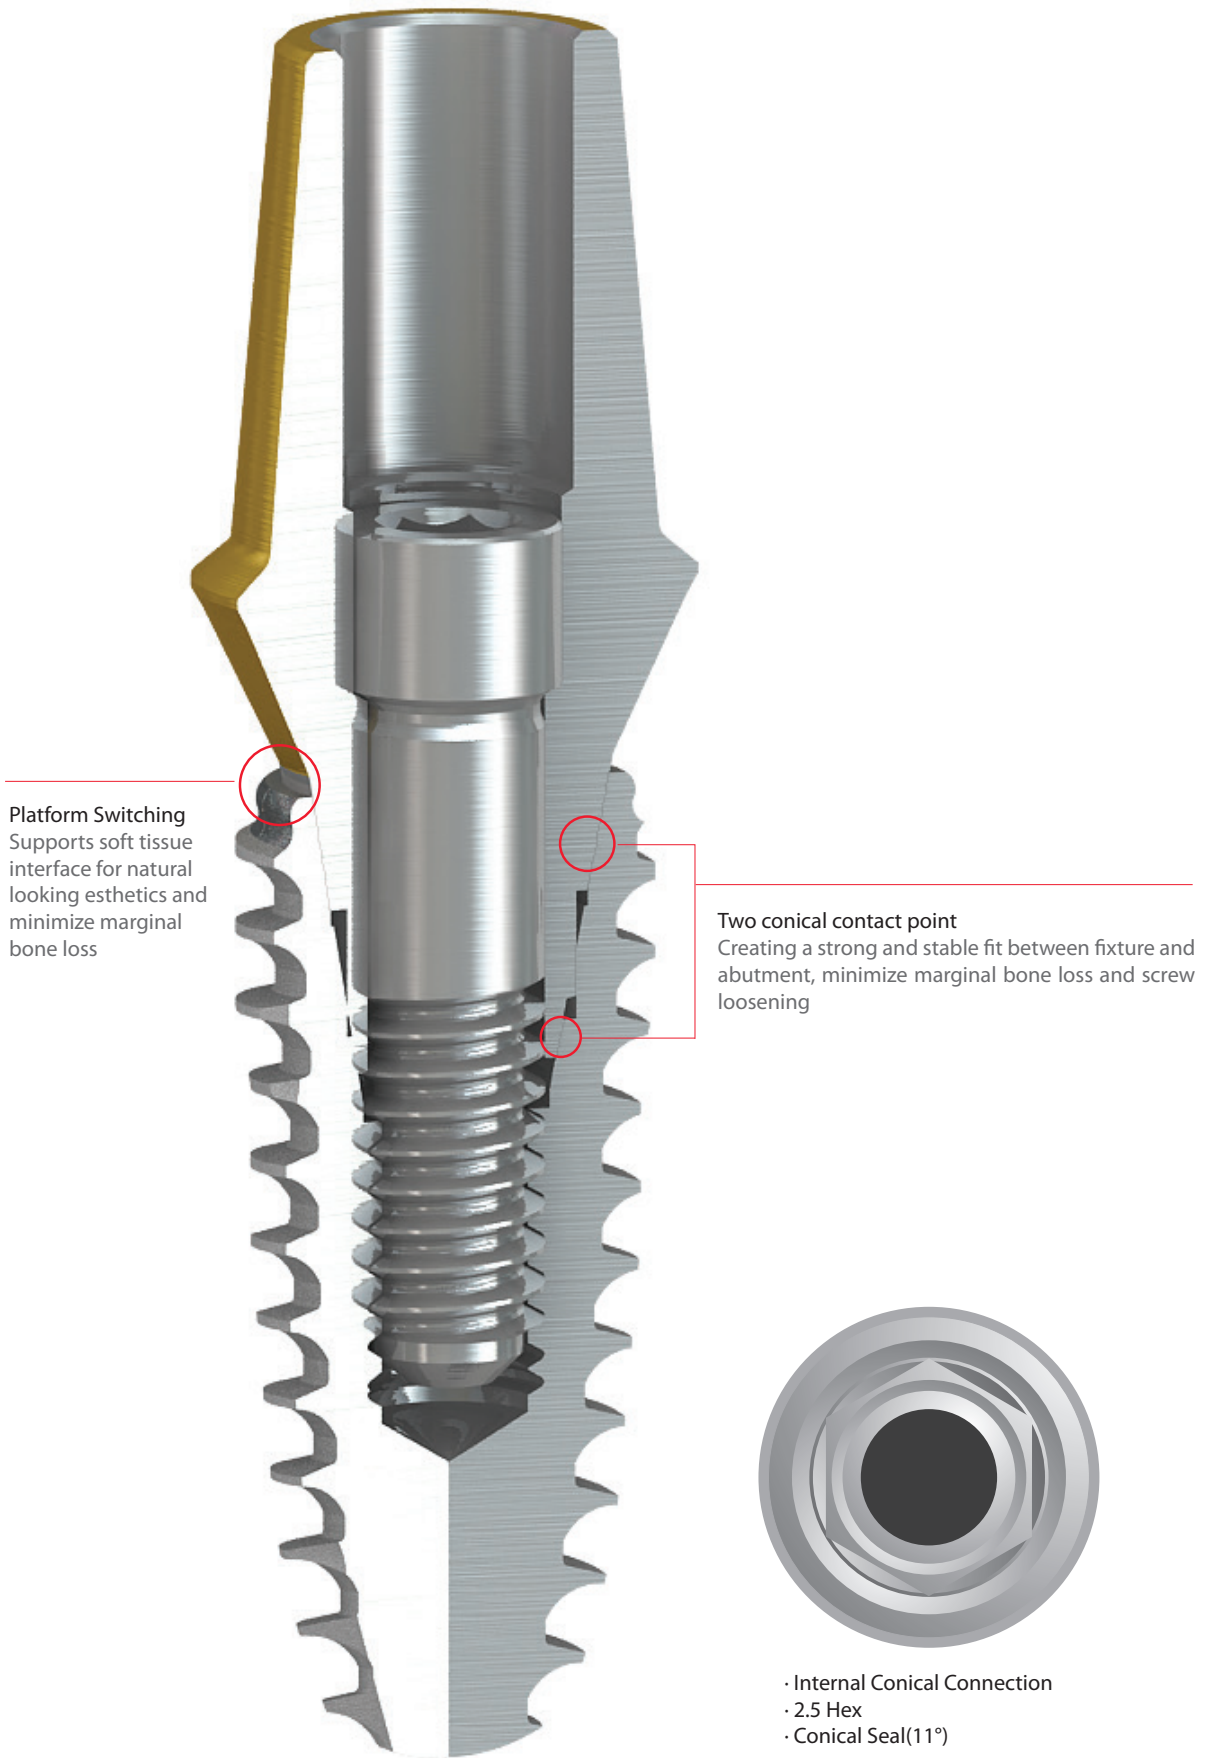

IS Healing Abutment

Temporary restorations for contouring of the soft tissue

• Tightening torque : 8~10 Ncm

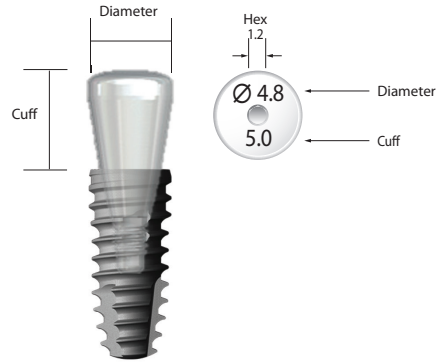

• Diameter \varnothing 3.0



Diameter	\varnothing 3.0	
Cuff(mm)	3.0	5.0
Product name	ISH3003*	ISH3005*


* These components are only for S-narrow fixture.

• Diameter \varnothing 3.8



Diameter	\varnothing 3.8	
Cuff(mm)	3.0	5.0
Product name	ISH3803*	ISH3805*


* These components are only for S-narrow fixture.



• Diameter \varnothing 4.0




Cuff(mm)	2.0	3.0	4.0	5.0	6.0
Product name	ISUH4002	ISUH4003	ISUH4004	ISUH4005	ISUH4006



• Diameter \varnothing 4.5



Cuff(mm)	2.0	3.0	4.0	5.0	6.0
Product name	ISUH4502	ISUH4503	ISUH4504	ISUH4505	ISUH4506




• Diameter \varnothing 4.8



Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH402	ISH403	ISH404	ISH405	ISH406	ISH407

* Scale 1 : 1.1


IS Healing Abutment



• Diameter \varnothing 5.5




Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH502	ISH503	ISH504	ISH505	ISH506	ISH507



• Diameter \varnothing 6.0




Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH602	ISH603	ISH604	ISH605	ISH606	ISH607



• Diameter \varnothing 6.8



Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH702	ISH703	ISH704	ISH705	ISH706	ISH707




• Diameter \varnothing 8.0



Cuff(mm)	2.0	3.0	4.0	5.0	6.0	7.0
Product name	ISH802	ISH803	ISH804	ISH805	ISH806	ISH807

※ \varnothing 8.0, \varnothing 9.0 Healing Abutments are for Custom Abutment



• Diameter \varnothing 9.0





Cuff(mm)	2.0	3.0	4.0
Product name	ISH902	ISH903	ISH904

※ \varnothing 8.0, \varnothing 9.0 Healing Abutments are for Custom Abutment


IS Temporary Abutment

Customizable titanium abutment for temporary crown and bridges

• Abutment Screw (ISCS20) included, Tightening torque : 30 Ncm

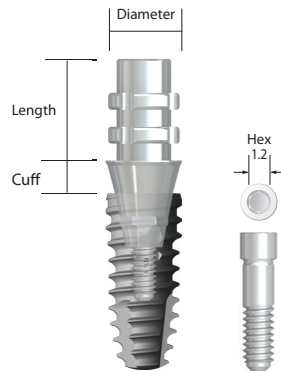


Hex Type

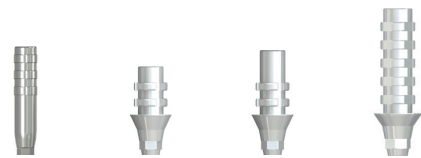

Diameter	Ø 3.2	Ø 4.5		
Cuff	1.0	2.0	2.0	1.5
Length(mm)	11.5	6.0	8.0	13.0
Product name	ISAHT300*	ISAHT460	ISAHT480	ISAHT4130


* This component is only for S-narrow fixture.
* ISCS16S : S-Narrow(Ø3.2)



SCRP® Type



Diameter	Ø 4.5		
Cuff	2.0	2.0	-
Length(mm)	6.0	8.0	13.0
Product name	ISAST460	ISAST480	ISAST4130



Non-Hex Type




Diameter	Ø 3.2	Ø 4.5		
Cuff	1.0	2.0	2.0	1.5
Length(mm)	11.5	6.0	8.0	13.0
Product name	Ø 4.5 ISANT300*	ISANT460	ISANT480	ISANT4130

* This component is only for S-narrow fixture.
* ISCS16S : S-Narrow(Ø3.2)

* Scale 1 : 1.1

Prosthetic Flow Chart


- IS Solid Abutment

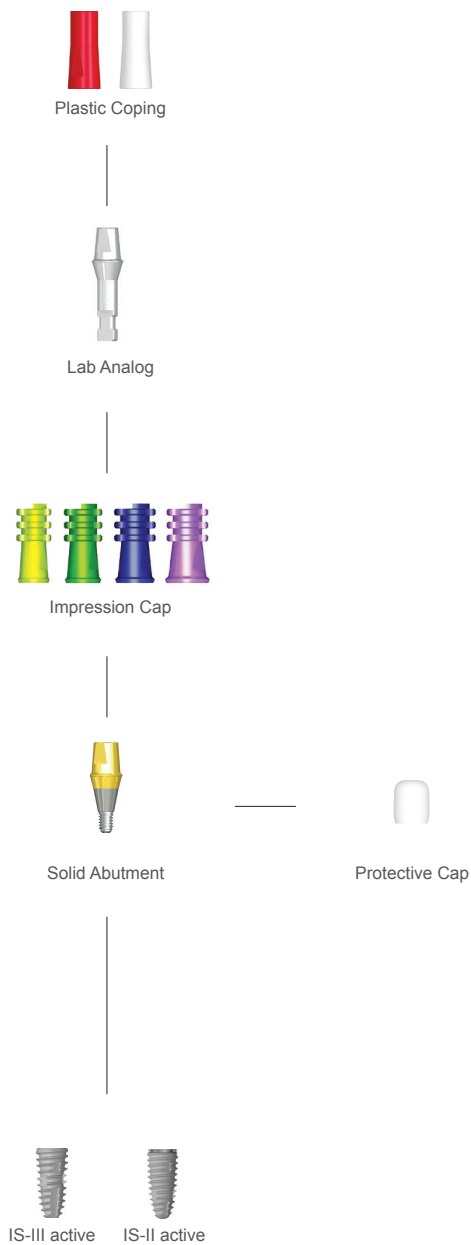

Note. When abutments are connected to Narrow Fixture(Ø3.5) or Short Fixture(7.3mm), the total height of abutment is 0.4mm higher than Regular-Wide cases. (IS-II active)
 When abutments are connected to Narrow Fixture(Ø3.5), the total height of abutment is 0.4mm higher than Regular-Wide cases. (IS-III active)

Prosthetic Flow Chart

- IS Abutment

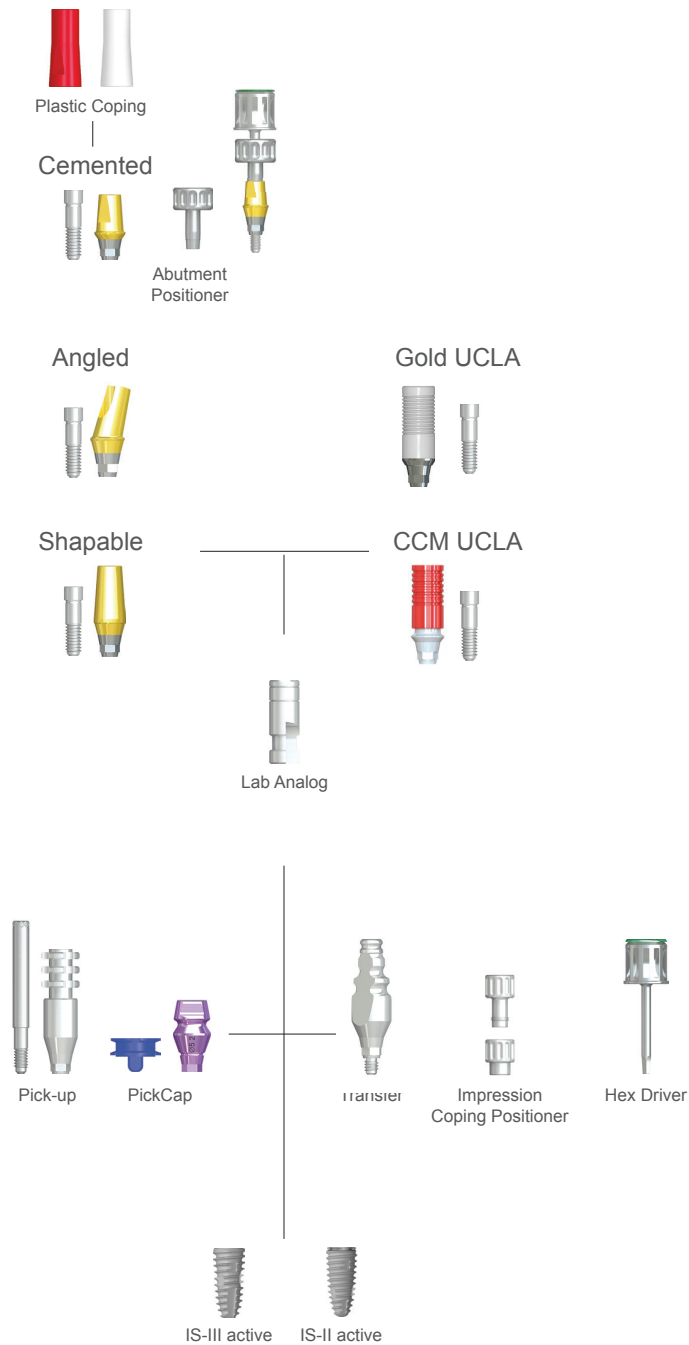


Note. When abutments are connected to Narrow Fixture(Ø3.5) or Short Fixture(7.3mm), the total height of abutment is 0.4mm higher than Regular-Wide cases. (IS-II active)
 When abutments are connected to Narrow Fixture(Ø3.5), the total height of abutment is 0.4mm higher than Regular-Wide cases. (IS-III active)

* Scale 1 : 1.1

Prosthetic Flow Chart


- IS Multi Unit Abutment

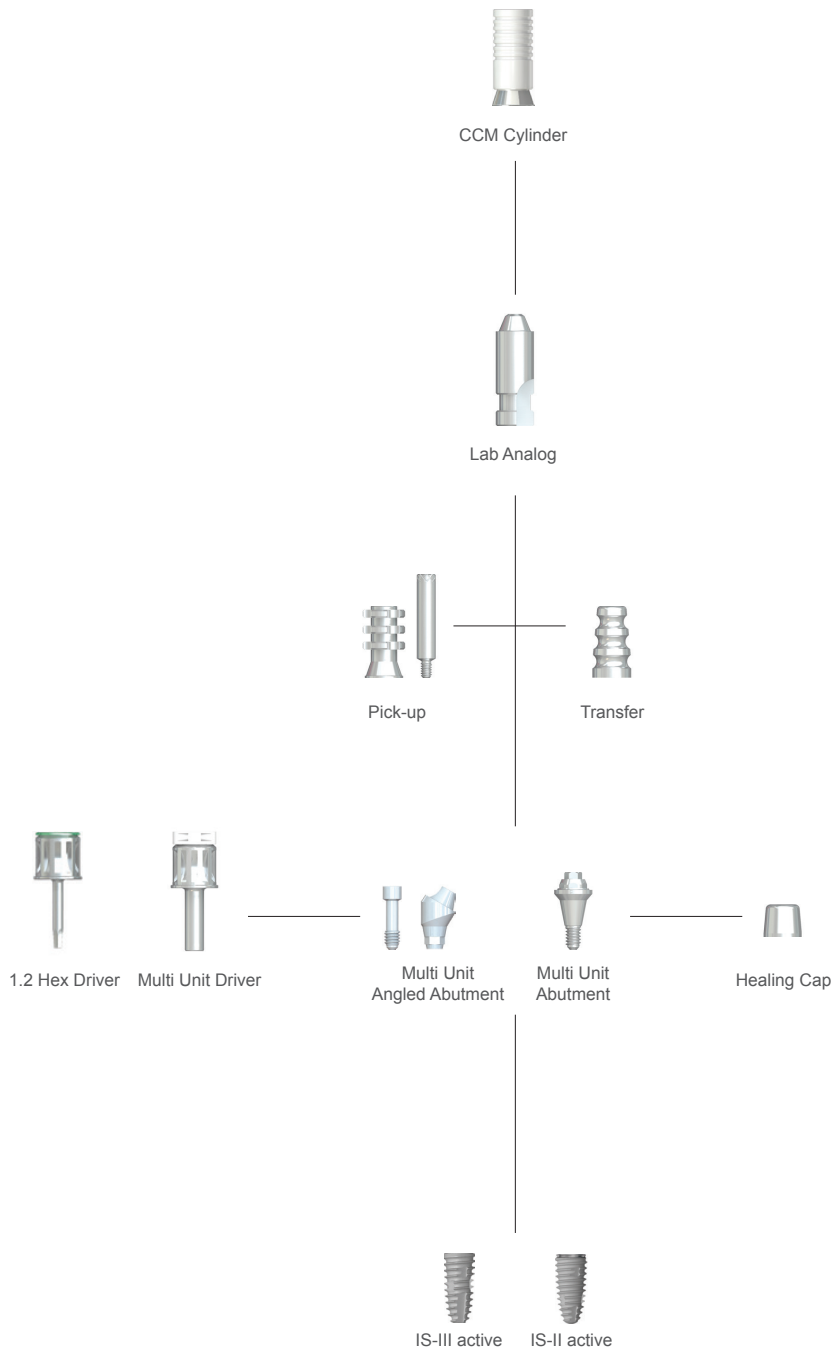

Note. When abutments are connected to Narrow Fixture(Ø3.5) or Short Fixture(7.3mm), the total height of abutment is 0.4mm higher than Regular-Wide cases. (IS-II active)
 When abutments are connected to Narrow Fixture(Ø3.5), the total height of abutment is 0.4mm higher than Regular-Wide cases. (IS-III active)

Prosthetic Flow Chart

- IS Ball Abutment

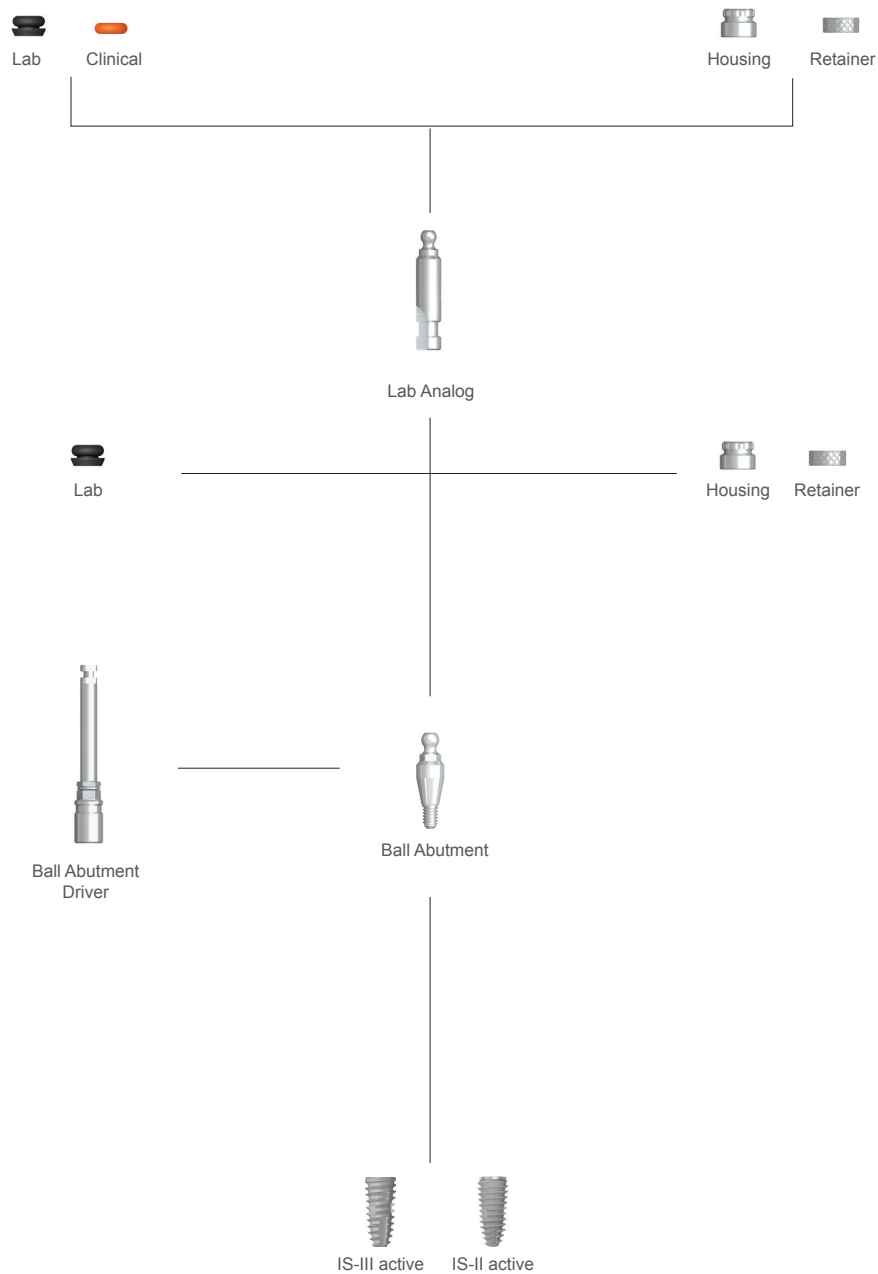


Note. When abutments are connected to Narrow Fixture(Ø3.5) or Short Fixture(7.3mm), the total height of abutment is 0.4mm higher than Regular-Wide cases. (IS-II active)
 When abutments are connected to Narrow Fixture(Ø3.5), the total height of abutment is 0.4mm higher than Regular-Wide cases. (IS-III active)

* Scale 1 : 1.1


IS Solid Abutment

One piece abutment for cemented restorations

• *Abutment Tightening Torque : 30 Ncm, Protective Cap Included*

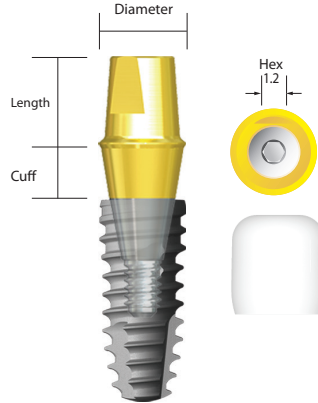


• Diameter $\varnothing 4.5$




	Cuff(mm)	1.0	2.0	3.0	4.0	5.0
Length	4.0mm	ISAE4140	ISAE4240	ISAE4340	ISAE4440	ISAE4540
	5.5mm	ISAE415	ISAE425	ISAE435	ISAE445	ISAE455
	7.0mm	ISAE417	ISAE427	ISAE437	ISAE447	ISAE457

• Diameter $\varnothing 5.2$




	Cuff(mm)	1.0	2.0	3.0	4.0	5.0
Length	4.0mm	ISAE5140	ISAE5240	ISAE5340	ISAE5440	ISAE5540
	5.5mm	ISAE515	ISAE525	ISAE535	ISAE545	ISAE555
	7.0mm	ISAE517	ISAE527	ISAE537	ISAE547	ISAE557

• Diameter $\varnothing 5.7$



	Cuff(mm)	1.0	2.0	3.0	4.0	5.0
Length	4.0mm	ISAE6140	ISAE6240	ISAE6340	ISAE6440	ISAE6540
	5.5mm	ISAE615	ISAE625	ISAE635	ISAE645	ISAE655
	7.0mm	ISAE617	ISAE627	ISAE637	ISAE647	ISAE657

• Diameter $\varnothing 6.5$




	Cuff(mm)	1.0	2.0	3.0	4.0	5.0
Length	4.0mm	ISAE7140	ISAE7240	ISAE7340	ISAE7440	ISAE7540
	5.5mm	ISAE715	ISAE725	ISAE735	ISAE745	ISAE755


IS Cemented Abutment (Hex Type)

Cementable or Screw-retained abutment for single tooth and bridges

- Customizable by grinding (need to remain at least 3mm of abutment length above fixture platform)
- Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm

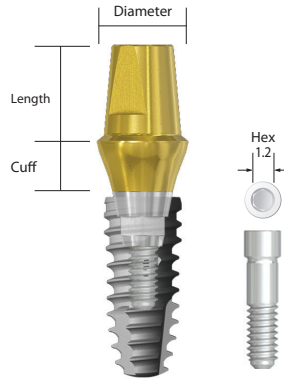


• Diameter $\varnothing 3.5$



Cuff	3.0	4.0	5.0	7.0
Length(mm)	7.0 mm			
Product name	ISAH3537*	ISAH3547*	ISAH3557*	ISAH3577*


* These components are only for S-narrow fixture.
* ISCS16S : S-Narrow($\varnothing 3.2$)

• Diameter $\varnothing 4.5$




Cuff(mm)	1.0	2.0	3.0	4.0	5.0	
Length	4.0mm	ISAH4140	ISAH4240	ISAH4340	ISAH4440	ISAH4540
	5.5mm	ISAH415	ISAH425	ISAH435	ISAH445	ISAH455
	7.0mm	ISAH417	ISAH427	ISAH437	ISAH447	ISAH457

• Diameter $\varnothing 5.2$




Cuff(mm)	1.0	2.0	3.0	4.0	5.0	
Length	4.0mm	ISAH5140	ISAH5240	ISAH5340	ISAH5440	ISAH5540
	5.5mm	ISAH515	ISAH525	ISAH535	ISAH545	ISAH555
	7.0mm	ISAH517	ISAH527	ISAH537	ISAH547	ISAH557

• Diameter $\varnothing 5.7$



Cuff(mm)	1.0	2.0	3.0	4.0	5.0	
Length	4.0mm	ISAH6140	ISAH6240	ISAH6340	ISAH6440	ISAH6540
	5.5mm	ISAH615	ISAH625	ISAH635	ISAH645	ISAH655
	7.0mm	ISAH617	ISAH627	ISAH637	ISAH647	ISAH657

• Diameter $\varnothing 6.5$




Cuff(mm)	1.0	2.0	3.0	4.0	5.0	
Length	4.0mm	ISAH7140	ISAH7240	ISAH7340	ISAH7440	ISAH7540
	5.5mm	ISAH715	ISAH725	ISAH735	ISAH745	ISAH755

* Scale 1 : 1.1


IS Cemented Abutment (SCRP® Type)

Abutment for screw-cement retained prosthesis

- Short hex design, *Retrievable within 20° between implants*
- Customizable by grinding (need to remain at least 3mm of abutment length above fixture platform)
- Abutment Screw (ISCS20) included, *Tightening Torque : 30 Ncm*

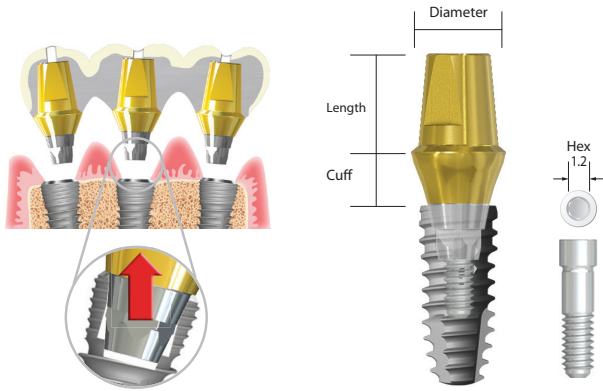


• Diameter Ø 4.5




		Cuff(mm)	1.0	2.0	3.0	4.0	5.0
Length	4.0mm	ISAS4140	ISAS4240	ISAS4340	ISAS4440	ISAS4540	
	5.5mm	ISAS415	ISAS425	ISAS435	ISAS445	ISAS455	
	7.0mm	ISAS417	ISAS427	ISAS437	ISAS447	ISAS457	

• Diameter Ø 5.2




		Cuff(mm)	1.0	2.0	3.0	4.0	5.0
Length	4.0mm	ISAS5140	ISAS5240	ISAS5340	ISAS5440	ISAS5540	
	5.5mm	ISAS515	ISAS525	ISAS535	ISAS545	ISAS555	
	7.0mm	ISAS517	ISAS527	ISAS537	ISAS547	ISAS557	

• Diameter Ø 5.7



		Cuff(mm)	1.0	2.0	3.0	4.0	5.0
Length	4.0mm	ISAS6140	ISAS6240	ISAS6340	ISAS6440	ISAS6540	
	5.5mm	ISAS615	ISAS625	ISAS635	ISAS645	ISAS655	
	7.0mm	ISAS617	ISAS627	ISAS637	ISAS647	ISAS657	

• Diameter Ø 6.5




		Cuff(mm)	1.0	2.0	3.0	4.0	5.0
Length	4.0mm	ISAS7140	ISAS7240	ISAS7340	ISAS7440	ISAS7540	
	5.5mm	ISAS715	ISAS725	ISAS735	ISAS745	ISAS755	


IS Cemented Abutment (Non-Hex Type)

Cementable or Screw-retained abutment for multiple or bridges

- Customizable by grinding (need to remain at least 3mm of abutment length above fixture platform)
- Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm

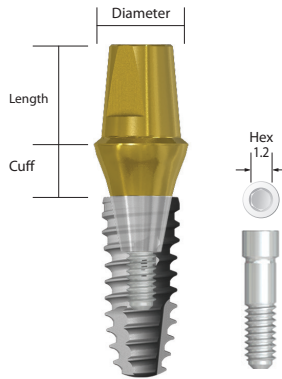

• Diameter $\varnothing 3.5$




Cuff	3.0	4.0	5.0	7.0
Length(mm)	7.0 mm			
Product name	ISAN3537*	ISAN3547*	ISAN3557*	ISAN3577*

* These components are only for S-narrow fixture.


* ISCS16S : S-Narrow($\varnothing 3.2$)

• Diameter $\varnothing 4.5$




Cuff(mm)	1.0	2.0	3.0	4.0	5.0	
Length	4.0mm	ISAN4140	ISAN4240	ISAN4340	ISAN4440	ISAN4540
	5.5mm	ISAN415	ISAN425	ISAN435	ISAN445	ISAN455
	7.0mm	ISAN417	ISAN427	ISAN437	ISAN447	ISAN457

• Diameter $\varnothing 5.2$




Cuff(mm)	1.0	2.0	3.0	4.0	5.0	
Length	4.0mm	ISAN5140	ISAN5240	ISAN5340	ISAN5440	ISAN5540
	5.5mm	ISAN515	ISAN525	ISAN535	ISAN545	ISAN555
	7.0mm	ISAN517	ISAN527	ISAN537	ISAN547	ISAN557

• Diameter $\varnothing 5.7$



Cuff(mm)	1.0	2.0	3.0	4.0	5.0	
Length	4.0mm	ISAN6140	ISAN6240	ISAN6340	ISAN6440	ISAN6540
	5.5mm	ISAN615	ISAN625	ISAN635	ISAN645	ISAN655
	7.0mm	ISAN617	ISAN627	ISAN637	ISAN647	ISAN657

• Diameter $\varnothing 6.5$




Cuff(mm)	1.0	2.0	3.0	4.0	5.0	
Length	4.0mm	ISAN7140	ISAN7240	ISAN7340	ISAN7440	ISAN7540
	5.5mm	ISAN715	ISAN725	ISAN735	ISAN745	ISAN755

* Scale 1 : 1.1



IS Shapable Abutment



Customizable by grinding (need to remain at least 3mm of abutment length above fixture platform)

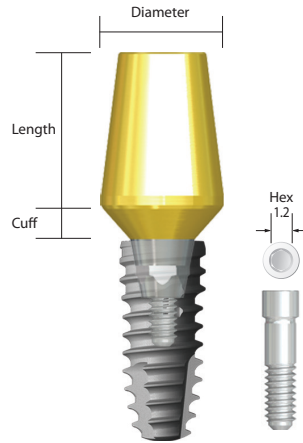• Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm







• Diameter $\varnothing 4.5$





		
Cuff(mm)	2.0	4.0
Hex	ISSH428	ISSH448
SCR ^P *	ISSS428	ISSS448



• Diameter $\varnothing 5.2$





		
Cuff(mm)	2.0	4.0
Hex	ISSH528	ISSH548
SCR ^P *	ISSS528	ISSS548



• Diameter $\varnothing 5.7$



		
Cuff(mm)	2.0	4.0
Hex	ISSH628	ISSH648
SCR ^P *	ISSS628	ISSS648

• Diameter $\varnothing 6.5$




		
Cuff(mm)	2.0	4.0
Hex	ISSH728	ISSH748
SCR ^P *	ISSS728	ISSS748



IS Angled Abutment

Customizable by grinding. Can be positioned in 12 directions by selecting A or B type

• Abutment Screw (ISCS16S) included, Tightening Torque : 30 Ncm

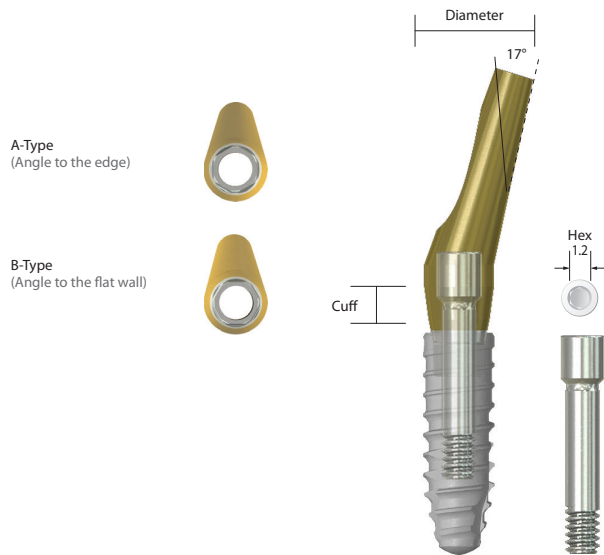

• Diameter \varnothing 3.2

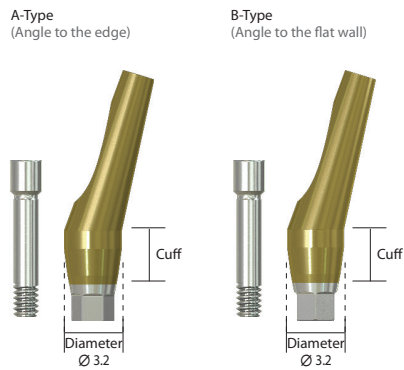

Type	A	B
Cuff(mm)	3.0	
Product name	ISAHA1739*	ISAHB1739*


* These components are only for S-narrow fixture.

* Scale 1 : 1.1


IS Angled Abutment

Customizable by grinding. Can be positioned in 12 directions by selecting A or B type

• Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm

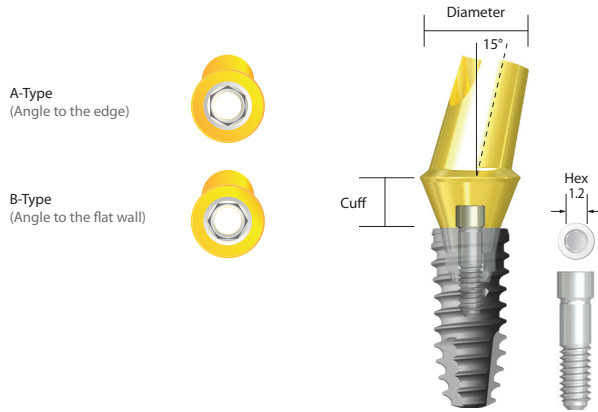


• Diameter $\varnothing 4.5$

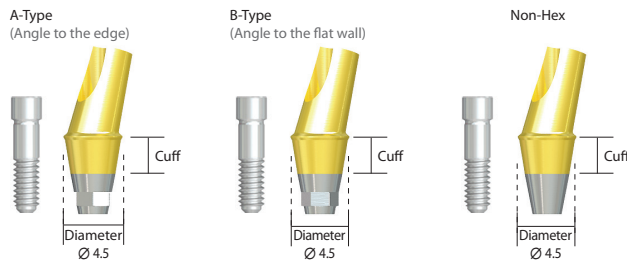


Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA1427	ISAHA1437	ISAHA1447
B Type	ISAHB1427	ISAHB1437	ISAHB1447
Non-Hex	ISANA1427	ISANA1437	ISANA1447

• Diameter $\varnothing 5.2$

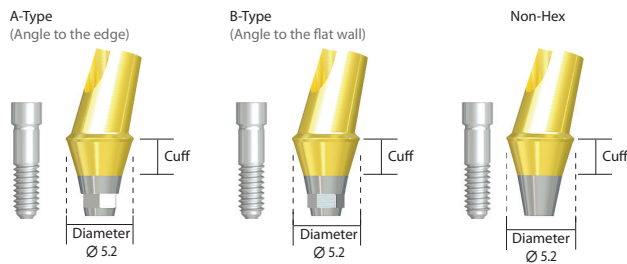

Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA1527	ISAHA1537	ISAHA1547
B Type	ISAHB1527	ISAHB1537	ISAHB1547
Non-Hex	ISANA1527	ISANA1537	ISANA1547

• Diameter $\varnothing 5.7$

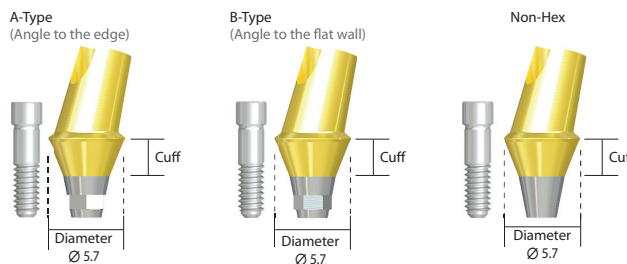


Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA1627	ISAHA1637	ISAHA1647
B Type	ISAHB1627	ISAHB1637	ISAHB1647
Non-Hex	ISANA1627	ISANA1637	ISANA1647


IS Angled Abutment

Customizable by grinding. Can be positioned in 12 directions by selecting A or B type

• Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm

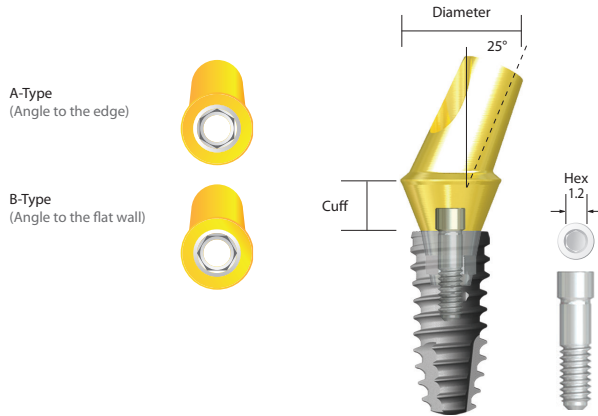


• Diameter $\varnothing 4.5$

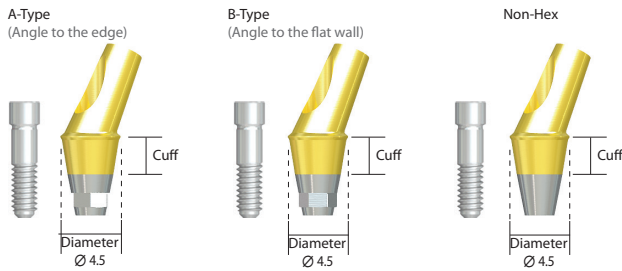


Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA2427	ISAHA2437	ISAHA2447
B Type	ISAHB2427	ISAHB2437	ISAHB2447
Non-Hex	ISANA2427	ISANA2437	ISANA2447

• Diameter $\varnothing 5.2$

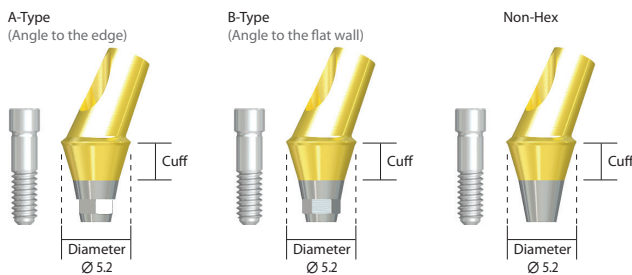

Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA2527	ISAHA2537	ISAHA2547
B Type	ISAHB2527	ISAHB2537	ISAHB2547
Non-Hex	ISANA2527	ISANA2537	ISANA2547

• Diameter $\varnothing 5.7$

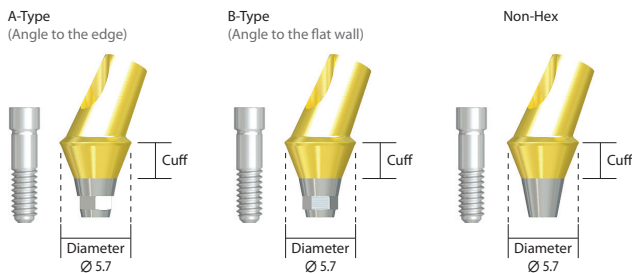


Cuff(mm)	2.0	3.0	4.0
A Type	ISAHA2627	ISAHA2637	ISAHA2647
B Type	ISAHB2627	ISAHB2637	ISAHB2647
Non-Hex	ISANA2627	ISANA2637	ISANA2647

* Scale 1 : 1.1

IS Gold UCLA Abutment

Customizable by casting. Cementable or Screw-retained abutment for single tooth and bridges.


- Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm
- Gold Casting

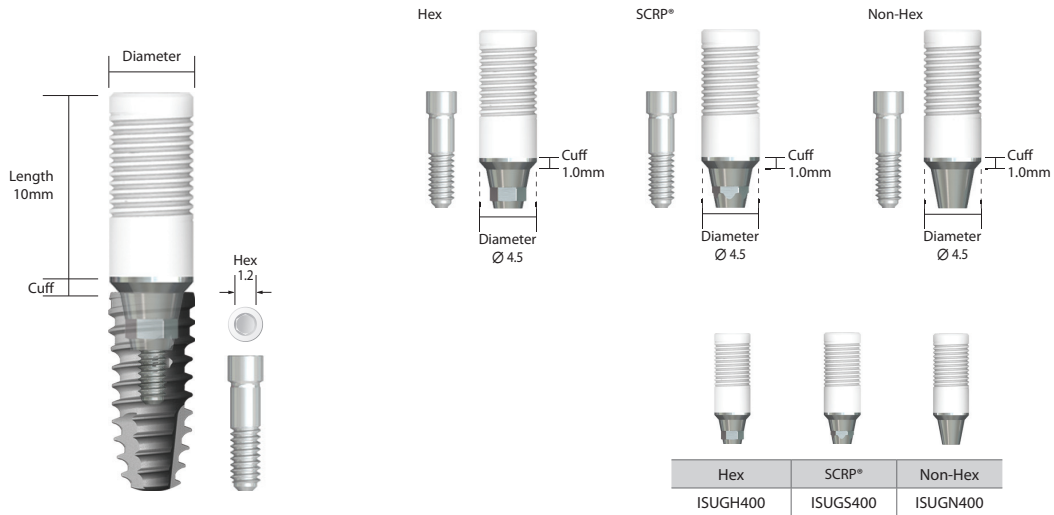

IS CCM UCLA Abutment



Customizable by casting. Cementable or Screw-retained abutment for single tooth and bridges.

- Abutment Screw (ISCS20) included, Tightening Torque : 30 Ncm
- Metal Casting

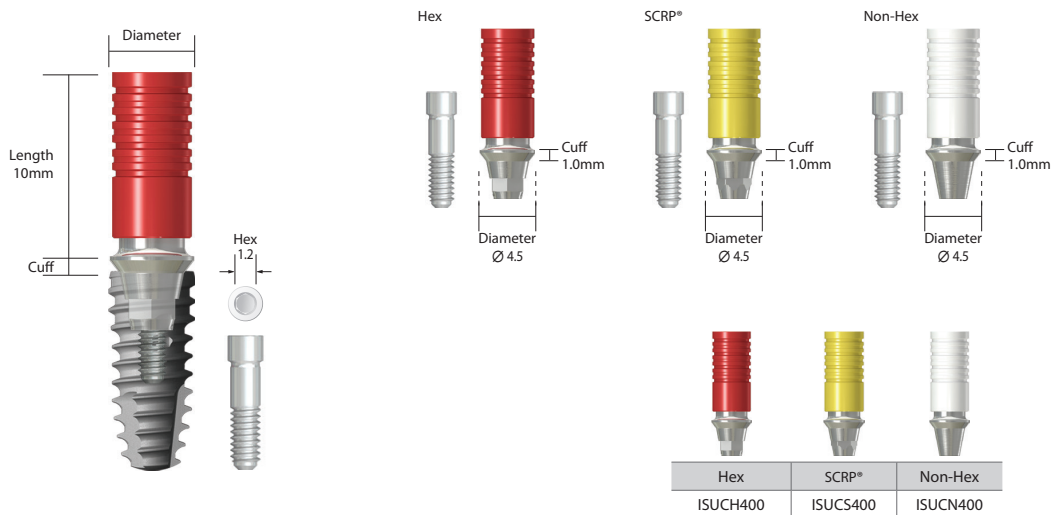

S-narrow PickCap Impression Coping

• S-narrow PickCap Impression Coping



Diameter	Ø3.5	
Cuff(mm)	5.0	7.0
Product name	ISSNPCI3505C*	ISSNPCI3507C*

* These components are only for S-narrow fixture.
 ※ PCISC01, ISPCIS16 included

• PickCap Impression Cap (Small)



Product name	PCISC01
--------------	---------

• S-narrow PickCap Impression Coping Screw







Product name	ISPCIS16
--------------	----------

* Scale 1 : 1.1

Components for Abutment Level

Protective Cap



• Diameter \varnothing 4.5



Length(mm)	4.5	5.5	7.0
Product name	ISPTC445	ISPTC455	ISPTC470

• Diameter \varnothing 5.2



Length(mm)	4.5	5.5	7.0
Product name	ISPTC545	ISPTC555	ISPTC570

• Diameter \varnothing 5.7







Length(mm)	4.5	5.5	7.0
Product name	ISPTC645	ISPTC655	ISPTC670

• Diameter \varnothing 6.5



Length(mm)	4.5	5.5	7.0
Product name	ISPTC745	ISPTC755	ISPTC770

Impression Cap



• Diameter \varnothing 4.5



Product name	ISPIC411
--------------	----------

• Diameter \varnothing 5.2



Product name	ISPIC511
--------------	----------

• Diameter \varnothing 5.7



Product name	ISPIC611
--------------	----------





• Diameter \varnothing 6.5



Product name	ISPIC711
--------------	----------

Components for Abutment Level

Lab Analog



• Diameter Ø 4.5



Length(mm)	4.0	5.5	7.0
Product name	ISLA440	ISLA455	ISLA470

• Diameter Ø 5.2



Length(mm)	4.0	5.5	7.0
Product name	ISLA540	ISLA555	ISLA570

• Diameter Ø 5.7





Length(mm)	4.0	5.5	7.0
Product name	ISLA640	ISLA655	ISLA670

• Diameter Ø 6.5



Length(mm)	4.0	5.5	7.0
Product name	ISLA740	ISLA755	ISLA770

Plastic Coping



Hex



Diameter(ø)	4.5	5.2	5.7	6.5
Product name	ISPCH410	ISPCH510	ISPCH610	ISPCH710

Non-Hex




Diameter(ø)	4.5	5.2	5.7	6.5
Product name	ISPCN410	ISPCN510	ISPCN610	ISPCN710

* Scale 1 : 1.1

Components for Fixture Level

Pick-up Impression Coping


• Diameter $\varnothing 4.0$

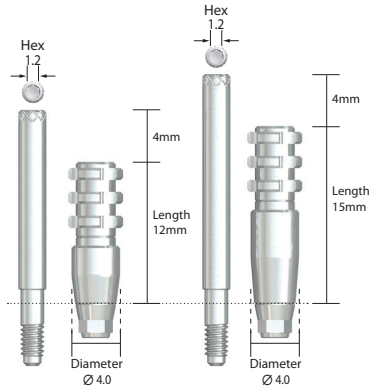

Type	Hex	SCR ^P *	Non-Hex
Short	ISIPH400	ISIPS400	ISIPN400
Long	ISIPHL400	ISIPSL400	ISIPNL400

* Impression coping Screw included
(Short - ISPIS20, Long - ISPISL20)


• Diameter $\varnothing 4.5$

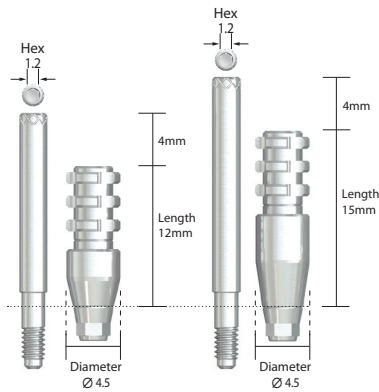

Type	Hex	SCR ^P *	Non-Hex
Short	ISIPH450	ISIPS450	ISIPN450
Long	ISIPHL450	ISIPSL450	ISIPNL450

* Impression coping Screw included
(Short - ISPIS20, Long - ISPISL20)

• Diameter $\varnothing 4.8$

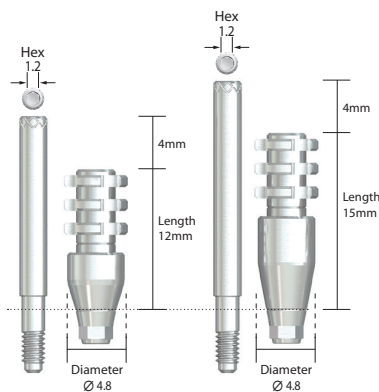


Type	Hex	SCR ^P *	Non-Hex
Short	ISIPH411	ISIPS411	ISIPN411
Long	ISIPHL411	ISIPSL411	ISIPNL411

* Impression coping Screw included
(Short - ISPIS20, Long - ISPISL20)

Components for Fixture Level

Pick-up Impression Coping


• Diameter $\varnothing 5.5$

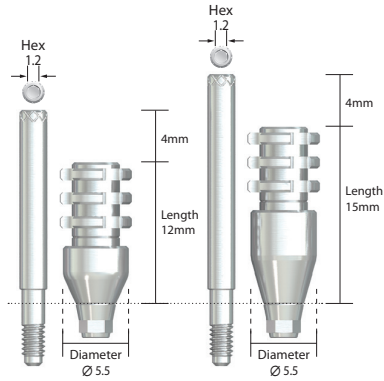

Type	Hex	SCRP*	Non-Hex
Short	ISIPH511	ISIPS511	ISIPN511
Long	ISIPHL511	ISIPSL511	ISIPNL511

* Impression coping Screw included
(Short - ISIPIS20, Long - ISIPISL20)


• Diameter $\varnothing 6.0$

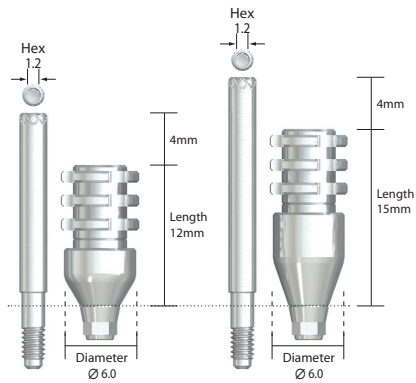

Type	Hex	SCRP*	Non-Hex
Medium	ISIPH611	ISIPS611	ISIPN611
Long	ISIPHL611	ISIPSL611	ISIPNL611

* Impression coping Screw included
(Short - ISIPIS20, Long - ISIPISL20)

• Impression Coping Screw




X-Long	ISIPIS20L
--------	-----------

* Scale 1 : 1.1

Components for Fixture Level

Transfer Impression Coping


• Diameter $\varnothing 4.8$

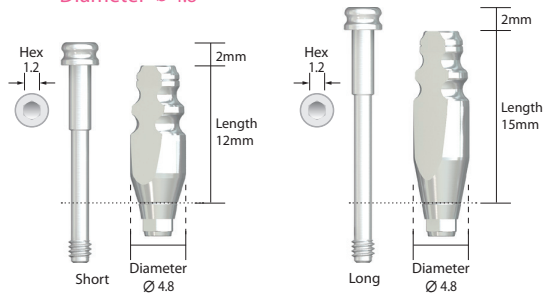

Type	Hex	Non-Hex
Short	ISITH411	ISITN411
Long	ISITHL411	ISITNL411

* Impression coping Screw included (Short - ISTIS20, Long - ISTISL20)


• Diameter $\varnothing 5.5$

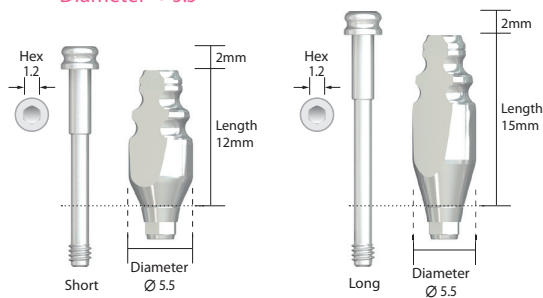

Type	Hex	Non-Hex
Short	ISITH511	ISITN511
Long	ISITHL511	ISITNL511

* Impression coping Screw included (Short - ISTIS20, Long - ISTISL20)


• Diameter $\varnothing 6.0$

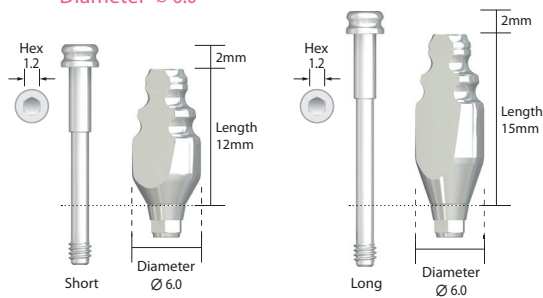

Type	Hex	Non-Hex
Short	ISITH611	ISITN611
Long	ISITHL611	ISITNL611

* Impression coping Screw included (Short - ISTIS20, Long - ISTISL20)


• Impression Coping Hex Screw

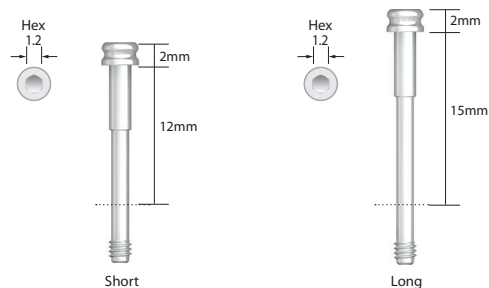

Short	ISTIS20H
Long	ISTISL20H

Components for Fixture Level

Transfer Impression Coping Positioner




* Connected to transfer impression coping



Product name	FDHSET01
--------------	----------

Lab Analog



Diameter	3.2	3.8	4.3
Product name	ISLA300	ISLA400	ISLA500

* ISLA300 : S-Narrow(Ø 3.2)

* ISLA400 : Narrow(Ø 3.5), All 7.3mm Fixtures



* ISLA500 : Regular, Wide Fixture

* Scale 1 : 1.1

IS Multi Unit Abutment

Screw-retained abutment for multiple or bridges

• *Abutment Tightening Torque : 30 Ncm, Cylinder screw 15 Ncm*



Multi Unit Abutment




Cuff(mm)	1.0	2.0	3.0	4.0
Product name	ISMUA4810S	ISMUA4820S	ISMUA4830S	ISMUA4840S

* Holder(MUAH48) Included

IS Multi Unit Angled Abutment

Screw-retained abutment for multiple or bridges

• *Abutment Tightening Torque : 30 Ncm, Cylinder screw 15 Ncm*




Multi Unit Angled Abutment



Cuff(mm)	1.0	2.0	3.0	4.0	
Hex	17°	ISAHMUA1410S	ISAHMUA1420S	ISAHMUA1430S	ISAHMUA1440S
	30°	ISAHMUA3410S	ISAHMUA3420S	ISAHMUA3430S	ISAHMUA3440S
Non-Hex	17°	ISANMUA1410S	ISANMUA1420S	ISANMUA1430S	ISANMUA1440S
	30°	ISANMUA3410S	ISANMUA3420S	ISANMUA3430S	ISANMUA3440S

* Holder Included




Temporary Cylinder, Non-Hex



Length(mm)	11.0
Product name	MUATPCN48


* Cylinder Screw(MUAS 14) Included



Pick-up Impression Coping



Length(mm)	9.0
Product name	MUAIP48



Transfer Impression Coping



Length(mm)	9.0
Product name	MUAIT48




Lab Analog



Product name	MUALA48
--------------	---------

1.2 Hex Driver




Length(mm)	10mm	15mm
Product name	HD1210S	HD1215S

Multi Unit Abutment Driver



Product name	MUAD48S
--------------	---------




CCM Cylinder, Non-Hex



Length(mm)	12.0
Product name	MUACCN48

* Cylinder Screw(MUAS 14) Included
* available separately



Healing Cap





Length(mm)	4.1
Product name	MUAHC48

* Scale 1 : 1.1

IS Ball Abutment

Implant over-denture ball attachment system

- Compensation degree : Max 20° between implants
- Abutment Tightening Torque : 30 Ncm



Ball Abutment



Cuff(mm)	1.0	2.0	3.0	4.0
Product name	ISABA100	ISABA200	ISABA300	ISABA400

* Ball Abutment Driver(BADH24) Required

Housing



Product name	BAH40
--------------	-------

* O-ring(BAORING) 5ea and O-ring(BAOIMP) 1ea Included

Retainer



Product name	BAR20
--------------	-------

* In case of occlusion interval is lower, use retainer instead of housing

* O-ring(BAORING) 5ea and O-ring(BAOIMP) 1ea Included

IS Ball Abutment



O-Ring (Clinical)



Product name	BAORING
--------------	---------

* 3ea Included



O-Ring (Lab)



Product name	BAOIMP
--------------	--------

* 3ea Included

* Prevents the resin flowing into the under of Housing or Retainer


1. while making a final resin denture at laboratory.
2. while inserting Housing or Retainer within denture directly at the office.



Ball Lab Analog



Product name	BALA350
--------------	---------

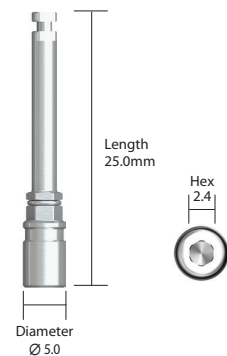

Ball Abutment Driver



Product name	BADH24
--------------	--------


The image features three wireframe 3D models of surgical kits, each contained within a rectangular tray. The kits are arranged in a grid-like pattern, with various surgical instruments such as forceps, probes, and scalpel handles visible. The wireframe style gives the models a technical, digital appearance. The background is a dark, gradient blue-grey, which makes the white wireframe models stand out. The text is overlaid on the left side of the image, partially overlapping the middle wireframe model.

Neobiotech SURGICAL KIT

Neo Master Kit / Neo Surgical Kit / IS Full Kit / S-Mini Kit / S-Wide Kit / S-Narrow Kit / Neo NaviGuide Kit /
Ridge Wider Kit / Neo Surgical Accessory Kit / Neo Prosthetic Kit / Neo Prosthetic Planning Kit /
Neo PickCap Impression Kit

Neo Master Kit Components


• Lindemann Drill



Diameter	Product name
Ø2.3	LDS23CS*
Ø2.3	LDS23CL*


* Optional

• Point Drill




Diameter	Product name
Ø1.35	PD13

• Initial Drill



Diameter	Type	Product name
Ø2.2	Short	TSD22CS
Ø2.2	Long	TSD22CL

• Drill



Diameter	Type	Product name
Ø3.0	Short	TSD30CS
Ø3.0	Long	TSD30CL
Ø3.5	Short	TSD35CS
Ø3.5	Long	TSD35CL
Ø4.0	Short	TSD40CS
Ø4.0	Long	TSD40CL
Ø4.5	Short	TSD45CS
Ø4.5	Long	TSD45CL

• Stopper

Stopper	3.0	4.0	5.0	6.0	6.6	7.3	8.5	10.0	11.5	13
Drilling Length(mm)	4.2	5.2	6.2	7.2	7.8	8.5	9.7	11.2	12.7	14.2
Product name	DS030C	DS040C	DS050C	DS060C	DS066C	DS070C	DS085C	DS100C	DS115C	DS130C

* Only stopper included. Please order Stopper holder(DSHC) separately.



Neo Master Kit Components

• Cortical Tap (IS-II active)

Diameter	Product name
Ø3.5	CT38S08*
Ø4.0	CT43S08*
Ø4.5	CT45S08*
Ø5.0	CT50S08*

* Optional

• Cortical Tap (IS-III / IT-III active)

Diameter	Product name
Ø3.5	CT38S09*
Ø4.0	CT43S09*
Ø4.5	CT45S09*
Ø5.0	CT50S09*

* Optional

• IS Fixture Driver

Length	Product name
Ratchet (Short)	ISFD10R*
Ratchet (Long)	ISFD15R*
Contra Angle (Short)	ISFD05C*
Contra Angle (Long)	ISFD05CL*

* Optional

• IT Fixture Driver

Length	Product name
Ratchet (Short)	ITFDO31RS*
Ratchet (Long)	ITFDO31RL*
Contra Angle (Short)	ITFDO31S*
Contra Angle (Long)	ITFDO31L*

* Optional

• Connector

Length	Product name
Short	RC10
Long	RC15

• MD Spacer

Diameter	Product name
Ø4.0	MDS4025
Ø7.0	MDS7030
Ø8.0	MDS8030

* Only stopper included.
Please order MD Spacer holder(MDSH) separately.

• Direction Pin

Diameter	Product name
Ø3.6	DP36
Ø4.5	DP45


• MD Parallel Pin

Diameter	Product name
Ø4.0 / Ø5.0	MDPP4050
Ø6.0 / Ø7.0	MDPP6070
Ø8.0 / Ø9.0	MDPP8090

* Scale 1 : 1

Neo Master Kit Components

• Hex Driver



Length	Product name
10mm	HD1210S
15mm	HD1215S

• Drill Extension




Product name	DE01
--------------	------

• Torque Ratchet



Product name	TW60
--------------	------

• Driver Holder & Depth Gauge

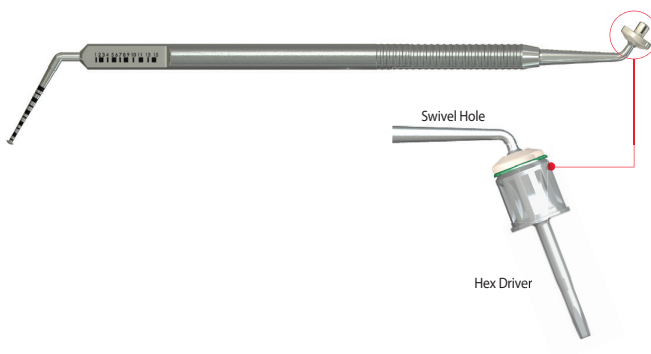

Product name	DHDG
--------------	------

Neo Master Kit Components


• S-narrow Surgical Drill



Diameter	Product name
Ø2.2	TSDS22CL*
Ø2.7	TSD27CL*

* Optional

• S-narrow Cortical Tap



Diameter	Product name
Ø3.2	CT32S09*

* Optional

• S-narrow Drill Stopper



Length(mm)	8.5	10	11.5	13
Product name	DS085CS*	DS100CS*	DS115CS*	DS130CS*

* Only stopper included.
Please order Stopper holder(DSHCS) separately.

• S-narrow Fixture Driver




Diameter	Product name
Contra Angle	ISFDSNCL*

* Optional


Neo Master Kit – Drilling Sequence

Drilling Speed & Torque


- Guide Point Drill, Initial Drill, Twist Drill : 1,200rpm / 35~45Ncm
Cortical Tap : 50rpm / 50Ncm
- IS-III active(IT-III active) Fixture $\varnothing 3.5$ X 10mm (D1/D2 bone)

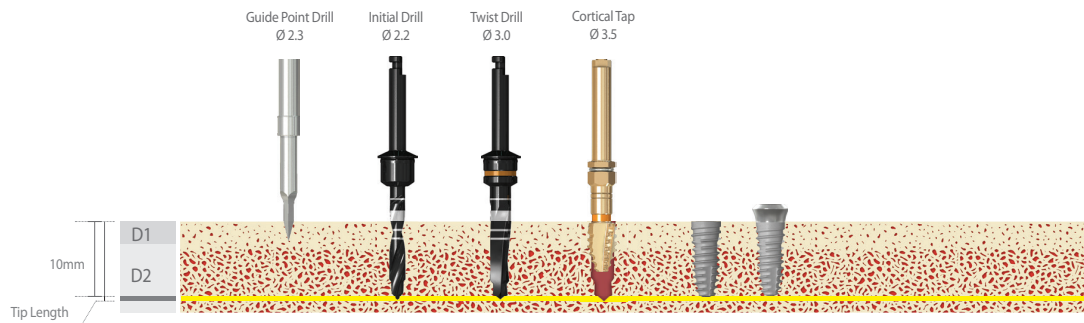


- IS-III active(IT-III active) Fixture $\varnothing 4.0$ X 10mm (D1/D2 bone)

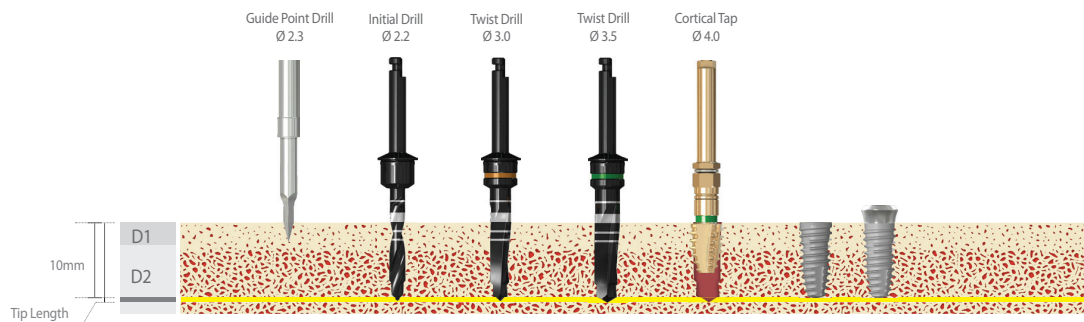

- IS-III active(IT-III active) Fixture $\varnothing 4.5$ X 10mm (D1/D2 bone)

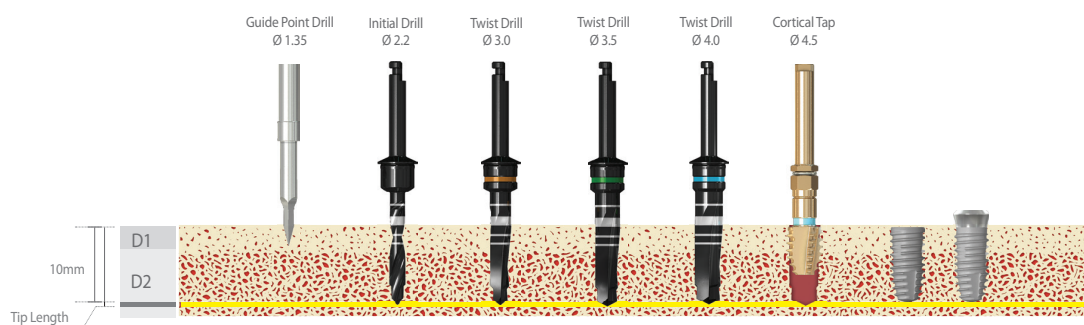


- IS-III active(IT-III active) Fixture $\varnothing 5.0$ X 10mm (D1/D2 bone)

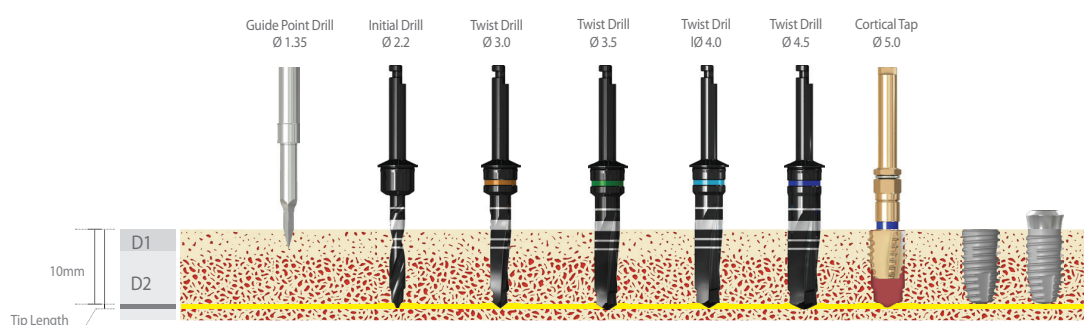


S-Wide Kit

This kit can be used to perform implant surgery for IS-III active(Ø5.5~Ø6.0), IS-II active(Ø5.5~Ø7.0), IT-III active Wide neck (Ø5.5~Ø6.0), EB S-Wide(Ø5.5~Ø6.0).

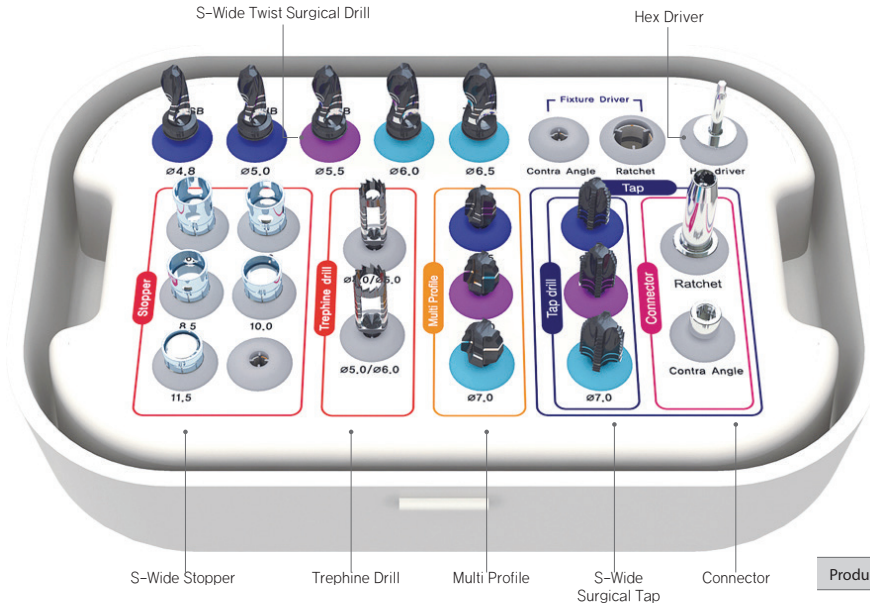


Product name	SWKIT
--------------	-------

• S-Wide Twist Surgical Drill

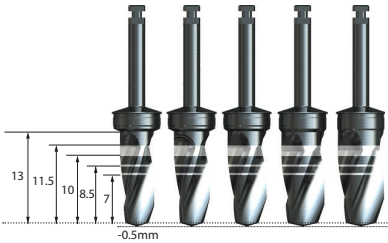


Diameter	Product name
Ø4.8	TSD48
Ø5.0	TSD50
Ø5.5	TSD55
Ø6.0	TSD60
Ø6.5	TSD65

• S-Wide Multi Profile




Diameter	Product name
Ø5.5	MP55
Ø6.0	MP60
Ø7.0	MP70

• Trepine Drill



Diameter	Product name
Ø4.0 / Ø5.0	TB40
Ø5.0 / Ø6.0	TB50

• S-Wide Surgical Tap




Diameter	Product name
Ø5.5	TD55
Ø6.0	TD60
Ø7.0	TD70

• S-Wide Drill Stopper

Length(mm)	6.0	7.0	8.5	10.0	11.5
Product name	DSL060	DSL070	DSL085	DSL100	DSL115


* Only stopper included. Please order Stopper holder(DSHL) separately.

• Hex Driver



Type	Product name
1.2Hex	HD1212s

• Connector



Type	Product name
Ratchet	RC10
Contra Angle	CAA00